

## DH-HAC-HDW1200R-VF

2Megapixel 1080P Water-proof HDCVI IR Eyeball Camera



### Features

- 1/2.7" 2Megapixel CMOS
- 25/30fps@1080P, 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and SD switchable
- OSD Menu, control over coaxial cable
- DWDR, Day/Night(ICR), AWB, AGC, BLC, 2DNR
- 2.7~12mm vari-focal lens
- Max. IR LEDs length 30m, Smart IR
- IP67, DC12V


# DH-HAC-HDW1200R-VF

## Technical Specifications

Model	DH-HAC-HDW1200RP-VF		DH-HAC-HDW1200RN-VF
Camera			
Image Sensor	1/2.7" 2Megapixel CMOS		
Effective Pixels	1920(H)×1080(V)		
Electronic Shutter	1/25~1/100000s	1/30~1/100000s	
Video Frame Rate	25/50fps@720P; 25fps@1080P	30/60fps@720P; 30fps@1080P	
Synchronization	Internal		
Min. Illumination	0.02Lux/F1.4, 0Lux IR on		
Video Output	1-channel BNC high definition video output/ CVBS standard definition video output (Can switch)		
Camera Features			
Max. IR LEDs Length	30m, Smart IR		
Backlight Compensation	DWDR		
Day/Night	Auto(ICR) / Color / B/W		
Noise Reduction	2D		
OSD Menu	Support		
Lens			
Focal Length	2.7~12mm		
Angle of View	H: 99° ~37°		
Lens Type	Manual / Fixed Iris		
Mount Type	Φ14		
General			
Power Supply	DC12V±25%		
Power Consumption	Max 3.5W		
Working Environment	-40℃~+60℃ / Less than 95%RH (no condensation)		
Transmission Distance	Over 500m via 75-3 coaxial cable		
Ingress Protection	IP67		
Dimensions	Φ119mm×97.4mm		
Weight	0.36kg		
Material	Metal		

## DH-HAC-HDW1200R-VF

### Dimensions (mm)

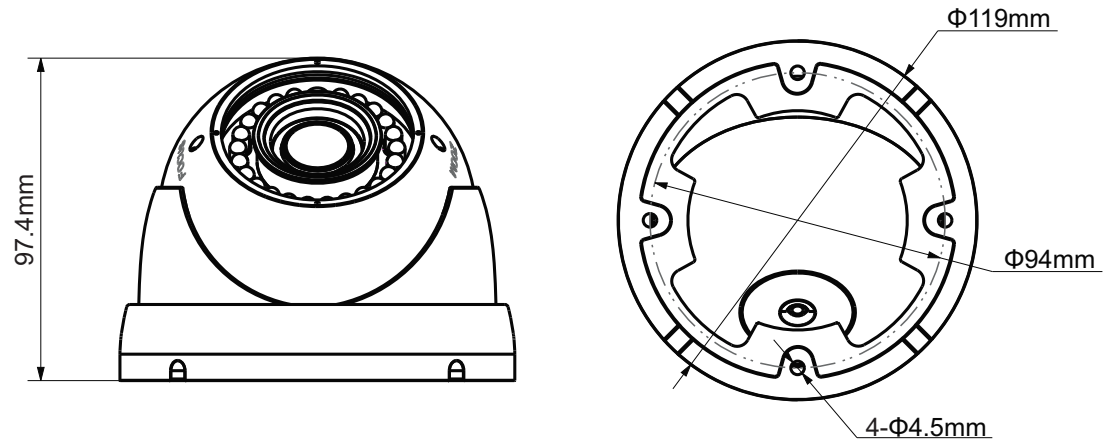

### Accessories (optional)

		
PFA13B	PFB204W	PFA152

### Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuasecurity.com](http://www.dahuasecurity.com)

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology