

DH-HAC-HFW1200R-VF-IRE6

2Megapixel 1080P Water-proof HDCVI IR Bullet Camera



Features

- 1/2.7" 2Megapixel CMOS
- 25/30fps@1080P, 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and SD switchable
- OSD Menu, control over coaxial cable
- DWDR, Day/Night(ICR), AWB, AGC, BLC, 2DNR
- 2.7~12mm vari-focal lens
- Max. IR LEDs length 60m, Smart IR
- IP67, DC12V

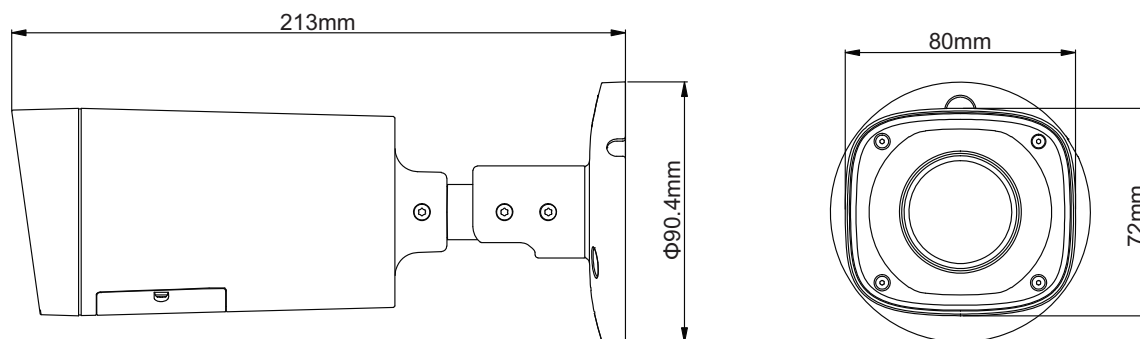
DH-HAC-HFW1200R-VF-IRE6

Technical Specifications



Model	DH-HAC-HFW1200RP-VF-IRE6		DH-HAC-HFW1200RN-VF-IRE6
Camera			
Image Sensor	1/2.7" 2Megapixel CMOS		
Effective Pixels	1920(H)×1080(V)		
Electronic Shutter	1/25~1/100000s	1/30~1/100000s	
Video Frame Rate	25/50fps@720P; 25fps@1080P	30/60fps@720P; 30fps@1080P	
Synchronization	Internal		
Mini. Illumination	0.02Lux/F1.4, 0Lux IR on		
Video Output	1-channel BNC high definition video output/ CVBS standard definition video output (Can switch)		
Camera Features			
Max. IR LEDs Length	60m, Smart IR		
Backlight Compensation	DWDR		
Day/Night	Auto(ICR) / Color / B/W		
Noise Reduction	2D		
OSD Menu	Support		
Lens			
Focal Length	2.7~12mm		
Angle of View	H: 99° ~37°		
Lens Type	Manual / Fixed Iris		
Mount Type	Φ14		
General			
Power Supply	DC12V±25%		
Power Consumption	Max 8.5W		
Working Environment	-40°C~+60°C / Less than 95%RH (no condensation)		
Transmission Distance	Over 500m via 75-3 coaxial cable		
Ingress Protection	IP67		
Dimensions(W×D×H)	213mm×80mm×72mm		
Weight	0.67kg		
Material	Metal		

DH-HAC-HFW1200R-VF-IRE6

Dimensions (mm)



Accessories (optional)

	
PFA135	PFA150

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.