

40x iA(intelligent Auto) H.265 PTZ Camera

Panasonic WV-S6131 captures the highest quality images automatically even in very challenging and fast-changing surveillance environments. Intelligent Auto (iA) monitors scene dynamics and motion to adjust key camera settings automatically in real-time reducing distortion such as motion blur on moving objects. New industry-leading 144dB dynamic range delivers balanced scene exposure in dynamic and extreme-backlit lighting environments. In addition, color night vision provides outstanding low-light performance with accurate color rendition and saturation from i-Pro's 1/3" sensor, rivaling the performance of costlier 1/2" sensor cameras in the market. Adopting H.265 Smart Coding technology, intelligently reduces bandwidth efficiency of up to 95%* over H.264 for longer recording and less storage. Cameras out-of-the-box, support full data encryption streaming and is compliant to FIPS 140-2 Level 1 standards to keep your video secured. *Value in Advanced mode. It depends on the scene.

Extreme image quality for evidence capturing under challenging conditions

- Long-distance vision with high power 40x zoom lens
- Sharp and clear image of fast moving vehicles with Intelligent Auto
- Outstanding low light performance in true color with low noise for night time applications
- Super Dynamic 144dB for backlit situation by headlights and shadows on the streets at night
- Long life Pan/Tilt gear mechanism

Extreme H.265 compression with new Smart Coding

- Longer recording, less storage compared to H.264 based compression techniques
- New self-learning ROI* encoding (Auto VIQS) dynamically detect motion areas to keep vehicles and human in good picture quality while lowering your bandwidth * Region of Interest

Extreme Data Security

- Full encryption SD card edge recording to keep your data safe
- FIPS 140-2 Level 1 compliant
- Full end-to-end system encryption with supported VMS and devices to protect from IP snooping/spoofing and detect data alteration

Key Features

- Full-HD 1920x1080 60fps
- 40x optical zoom
- Durable Pan/Tilt gear mechanism
- iA (intelligent Auto)
- Extreme Super Dynamic 144dB
- Color night vision (0.001 to 0.015 lx)

Applications

- Retail(Shopping mall)
- Airport
- Subway
- Casino
- Logistics



Specifications

| | | |
|----------------|--------------------------------------|--|
| Camera | Image Sensor | Approx. 1/2.8 type MOS image sensor |
| | Minimum Illumination | Color : 0.015 lx, BW : 0.006 lx (F1.6, Maximum shutter : Off (1/30s), AGC : 11) Color : 0.001 lx, BW : 0.0004 lx (F1.6, Maximum shutter : Max. 16/30s, AGC : 11) *1 |
| | Intelligent Auto | On / Off |
| | Shutter Speed | 1/30 Fix to 1/10000 Fix *1/30 Fix to 2/120 Fix is available during 30 fps mode only. *1/60 Fix is available during 60 fps mode only. |
| | Super Dynamic ² | On / Off, the level can be set in the range of 0 to 31. |
| | Dynamic Range | 144 dB (Super Dynamic : On) |
| | Image Settings | Gain (AGC), White balance |
| | Image Compensation | Adaptive black stretch, Back light compensation (BLC), Fog compensation, High light compensation (HLC), Digital noise reduction |
| | Color/BW (ICR) | Off / On / Auto1 (Normal) / Auto2 (IR Light) / Auto3 (SCC) |
| | Video Motion Detection (VMD) | On / Off, 4 areas available |
| | Intelligent VMD (i-VMD) ³ | Type 4 *optional plug-in software WV-SAE200 |
| | Stabilizer ³ | On / Off (available only in the 30 fps mode) |
| | Privacy Zone | Filling / Pixelate / Off (up to 32 zones available) |
| | Camera Title (OSD) | On / Off Up to 20 characters (alphanumeric characters, marks) |
| | Zoom Ratio | 40x Optical 60x with HD Extra Optical Zoom (Resolution 1280×720.) |
| | Digital (electronic) zoom | 16x |
| | Focal length | 4.25 mm – 170 mm (5/32 inches – 6-11/16 inches) |
| Lens | Maximum Aperture Ratio | 1 : 1.6 (WIDE) – 1 : 4.95 (TELE) |
| | Focus range | 3.0 m (9 ft 10-1/8 inches) – ∞ |
| | Angular Field of view | [16 : 9 mode] Horizontal : 1.9 ° (TELE) – 66 ° (WIDE) Vertical : 1.1 ° (TELE) – 39 ° (WIDE) [4 : 3 mode] Horizontal : 1.4 ° (TELE) – 51 ° (WIDE) Vertical : 1.1 ° (TELE) – 39 ° (WIDE) |
| | Pan/tilt | Panning Range 360° Endless panning Panning Speed Manual : Approx. 0.065°/s – 120°/s Preset : Up to approx. 300°/s Tilting Range –25° to 205° (level-downward-level) Tilting Speed Manual : Approx. 0.065°/s – 120°/s Preset : Up to approx. 300°/s Preset Positions 256 positions Auto Mode Auto track ³ / Auto pan/ Preset sequence/ Patrol Self Return 10 s/ 20 s/ 30 s/ 1 min/ 2 min/ 3 min/ 5 min/ 10 min/ 20 min/ 30 min/ 60 min |
| | Browser GUI | Camera Control Pan/Tilt, Zoom, Focus, Auto mode, Brightness, Preset, AUX, Rec. on SD, Log, Viewer software Audio Mic (Line) Input : On / Off Volume adjustment : Low / Middle / High Audio Output : On / Off Volume adjustment : Low / Middle / High GUI / English, Italian, French, German, Spanish, Portuguese, Russian, Setup Menu Language Chinese, Japanese |
| Network | Network IF | 10Base-T / 100Base-TX, RJ45 connector |
| | Resolution | *2 mega pixel [16 : 9] (30/60 fps) 1920×1080, 1280×720, 640×360, 320×180 |
| | H.265/ H.264 JPEG (MJPEG) | *3 mega pixel [4 : 3] (30 fps) 2048×1536*, 1280×960, 800×600, VGA, 400×300, QVGA *Used by super resolution techniques |
| | H.265/ H.264 ⁴ | Transmission Mode Constant bit rate / VBR / Frame rate / Best effort Transmission Type Unicast / Multicast |
| | JPEG | Image Quality 10 steps |

| | | |
|----------------|---------------------------------------|--|
| Network | Smart Coding | Smart Facial Coding ³ : On(Smart Facial Coding)/ On(AUTO VIQS)/ Off * Smart Facial Coding is only available with Stream(1). GOP(Group of pictures) control : On(Advanced)/ On(Low)/ On(Mid)/ Off * On(Advanced) is only available with H.265. |
| | Audio Compression | G.726 (ADPCM) : 16 kbps / 32 kbps, G.711 : 64 kbps, AAC-LC ⁵ : 64 kbps / 96 kbps / 128 kbps |
| | Audio transmission mode | Off / Mic (Line) input / Audio output / Interactive (Half duplex) / Interactive (Full duplex) |
| | Supported Protocol | IPv6 : TCP/IP, UDP/IP, HTTP, HTTPS, RTP, FTP, SMTP, DNS, NTP, SNMP, DHCPv6, MLD, ICMP, ARP, IEEE 802.1X, DiffServ IPv4 : TCP/IP, UDP/IP, HTTP, HTTPS, RTSP, RTP, RTP/RTCP, FTP, SMTP, DHCP, DNS, DDNS, NTP, SNMP, UPnP, IGMP, ICMP, ARP, IEEE 802.1X, DiffServ |
| | Maximum concurrent access number | Up to 14 users (Depends on network conditions) |
| | SDXC/SDHC/SD | H.265 / H.264 recording : Manual REC / Alarm REC (Pre/Post) / Schedule REC / Backup upon network failure JPEG recording : Manual REC / Alarm REC (Pre/Post) / Backup upon network failure |
| | Memory Card (Option) | Compatible SDXC/SDHC/SD Memory Card : Panasonic 2 GB, 4 GB*, 8 GB*, 16 GB*, 32 GB*, 64 GB*, 128 GB** 256 GB** model *SDHC card, ** SDXC card (except miniSD card and microSD card) |
| | Mobile Terminal Compatibility | iPad / iPhone, Android™ mobile terminals |
| | Alarm | Alarm Source 3 terminals input, VMD alarm ⁶ , Command alarm, Audio detection alarm, Auto track alarm Alarm Actions SDXC/SDHC/SD memory recording, E-mail notification, HTTP alarm notification, Indication on browser, FTP image transfer, Panasonic protocol output |
| | Input/ Output | Audio Input ø3.5 mm stereo mini jack (monaural input) Input impedance: Approx. 2 kΩ (unbalanced) (Applicable microphone: Plug-in power type) Supply voltage: 4.0 V ±0.5 V Audio Output ⁷ ø3.5 mm stereo mini jack (monaural output) Output impedance : Approx. 600 Ω (unbalanced) External I/O Terminals ALARM IN 1 (Black & white input, Auto time adjustment input) (x1), ALARM IN 2 (ALARM OUT) (x1), ALARM IN 3 (AUX OUT) (x1) |
| General | Power Source and Power Consumption | DC12 V 1 A, Approx. 12 W PoE(IEEE802.3af compliant) DC48 V 250 mA, Approx. 12 W (Class0 device) |
| | Ambient Operating Temperature | -10°C to +50°C (14 °F to 122 °F) |
| | Ambient Operating Humidity | 10 to 90 % (no condensation) |
| | Dimensions | Maximum ø185 mm × 214 (H) mm {ø7-9/32 inches × 8-7/16 inches (H)} |
| | Mass (approx.) | Approx. 1.74 kg (3.84 lbs) Including camera mount bracket, decorative cover : Approx. 240 g (0.53 lbs) |
| | Finish | Camera : ABS resin (Coating color : Black) Decorative cover : ABS resin (Resin color : Sail white) |

*1 Converted value

*2 Super Dynamic function is automatically set off on 60 fps mode.

*3 Stabilizer, Auto track, Smart Facial Coding, i-VMD, cannot be used at the same time.


*4 Transmission for 4 streams can be individually set.

*5 Only use AAC-LC (Advanced Audio Coding - Low Complexity) when recording audio on an SD memory card.

*6 Including alarms from Plug-in Software

*7 The audio output can be switched to the monitor output. Refer to the Operating Instructions on the provided CD-ROM for descriptions of how to switch the output.

Appearance

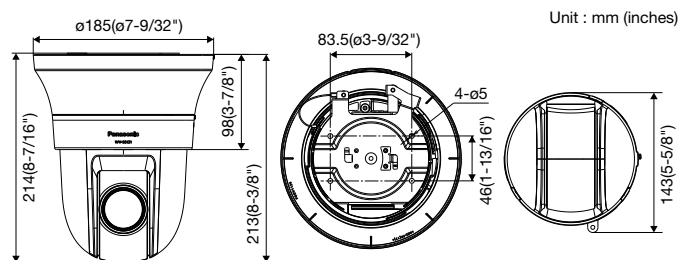

Trademarks and registered trademarks

- iPad and iPhone are registered trademarks of Apple Inc.
- Android is a trademark of Google Inc.
- ONVIF and the ONVIF logo are trademarks or registered trademarks of ONVIF Inc.
- All other trademarks identified herein are the property of their respective owners.

Important

- Safety Precaution : Carefully read the Important Information, Installation Guide and operating instructions before using this product.
- Panasonic cannot be responsible for the performance of the network and/or other manufacturers' products used on the network.

- Masses and dimensions are approximate. • Specifications are subject to change without notice.

Optional Accessories

* This catalog is provided for all over the world. Some accessories may not be available in some countries.


| | | | | |
|---|--|---|--|--|
| Ceiling Mount Bracket WV-Q105A | Embedded Ceiling Mount Bracket WV-Q126A | Wall Mount Bracket WV-Q119 | Dome Cover (Smoke type) WV-CS5S | Dome Cover (Clear type) WV-CS5C |
| | | | | |

Plug-in Software for i-VMD

WV-SAE200

i-VMD is possible to detect objects in the specified area by advanced video analysis technology.

i-VMD : Intruder Detection, Loitering Detection, Direction Detection, Scene Change Detection,
Object Detection, Cross Line Detection

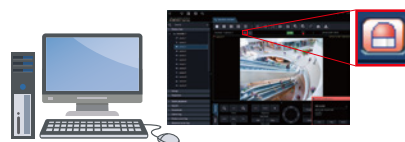

Notification sent to the monitoring screen

DISTRIBUTED BY :

Panasonic

<http://security.panasonic.com>

<http://www.facebook.com/PanasonicNetworkCamera>

(2A-193AA)